

Spot Torch Base



GU10 Bulb not included
(MR16/GU10 - Ø50 mm)

Voltage Voltaje

• 220-240VAC

Cod.

P611.00000000.x



Protection Protección

• IP20




Finishes Acabados

- Black
- White

Downloads Descargas

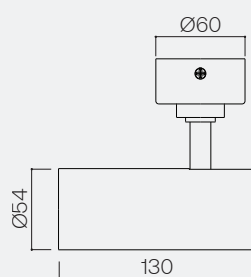

Nik

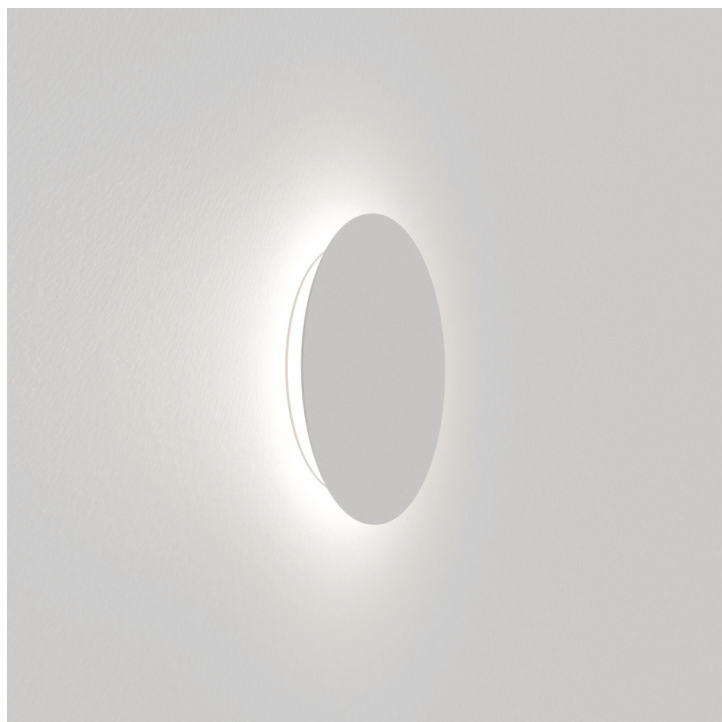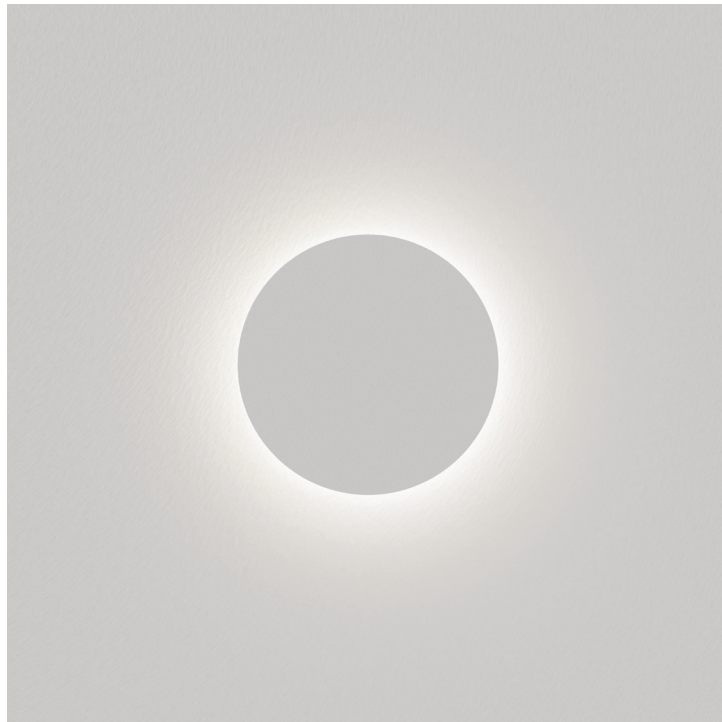

Luminary**Luminária**

- L70 > 50000h
- MacAdam 3

Optic Óptica

- Opal diffuser

Voltage Voltaje

- 220-240VAC

Dimming Regulación

- ON-OFF

Protection Protección

- IP20

Basic finishes**Acabados básicos**

- Black
- White

Special finishes**Acabados especiales****NCS**

- Oliva - S 7010-G30Y
- Ocre - S 5040-Y70R
- Terracota - S 3050-Y60R
- Mocha - S 5010-Y10R
- Sand - S 2005-Y50R

Metallic Metálico

- Dark Bronze
- Median Bronze
- Light Bronze
- Brushed Copper
- Old Silver

Downloads Descargas

Cod.	W	Beam angle	CRI	K	Lm	Efficiency
250 mm						
2263.927002AZ.x	2,4W	360°	90	2700K	106Lm	45Lm/W
2263.930002ZZ.x	2,4W	360°	90	3000K	111Lm	47Lm/W
2263.940002AZ.x	2,4W	360°	90	4000K	114Lm	48Lm/W
350 mm						
2264.927004AZ.x	5,3W	360°	90	2700K	238Lm	45Lm/W
2264.930004AZ.x	5,3W	360°	90	3000K	245Lm	47Lm/W
2264.940004AZ.x	5,3W	360°	90	4000K	253Lm	48Lm/W
450 mm						
2265.927006AZ.x	7,7W	360°	90	2700K	347Lm	46Lm/W
2265.930006AZ.x	7,7W	360°	90	3000K	359Lm	47Lm/W
2265.940006AZ.x	7,7W	360°	90	4000K	371Lm	49Lm/W

