

Sky Switch 10W–40W


outdoor lighting



4679 / 4680 / 4681 / 4682 / 4683 / 4684 / 4685 / 4686 / 4687 / 4688 / 4689 / 4694



Voltage	Power	Energy Efficiency Class For Light Source			Material	Beam Angle	Net Weight	Size(LxWxH)	Electric shock
		3000K	4000K	5000K					
180-260VAC	10W	F	E	F	Aluminium	115°	380g	138x118.5x36mm	Protection class I
180-260VAC	20W	E	D	E	Aluminium	115°	510g	162x144x36mm	
180-260VAC	30W	E	D	E	Aluminium	115°	510g	162x144x36mm	
180-260VAC	40W	E	E	E	Aluminium	115°	900g	224x203x36mm	



User Manual

Important User Advice

This Product is Class I and must be Earthed.
 Always switch o mains supply before tting.
 Replace any broken or damaged glass as soon as possible.
 Ensure all seals are intact and operational after tting or maintenance.
 Do not touch the lamp in use or just after use as there is a risk of being burnt.
 Take o from ammmable materials.
 Do not wash the lamp.
 Keeping your eyes with a security distance,the light could cause damage.

Installation


Find a suitable location to install this product.
 Prepare the mains wiring.
 Use the mounting bracket to mark the hole centres for xing.
 Drill holes suitable to accept wall plugs. Inser wal plugs.
 Ensure mounting bracket.
 Terminate wiring. Pay particular attention to any markings fo Replace all covers.
 Fit the oodlight to the mounting bracket with the screws.
 Check seals, gaskets and cable gland operation befor testing the luminaire.
 Turn on power supply and test luminaire.

Maintenance


This produce has no user serviceable parts.
 Clean with a damp cloth and dry with a lin free cloth or kitcher towel.

Important Information

It is recommend that luminaire installed and tted by a qualied electrician ensuring the installation.complies to the current building regulations.
 These products are designed for connection to a 220-240V supply.
 And broken or damaged parts should be replaced as soon as possible.
 LEL will not accept responsibility for any claims arising from a poor installation.

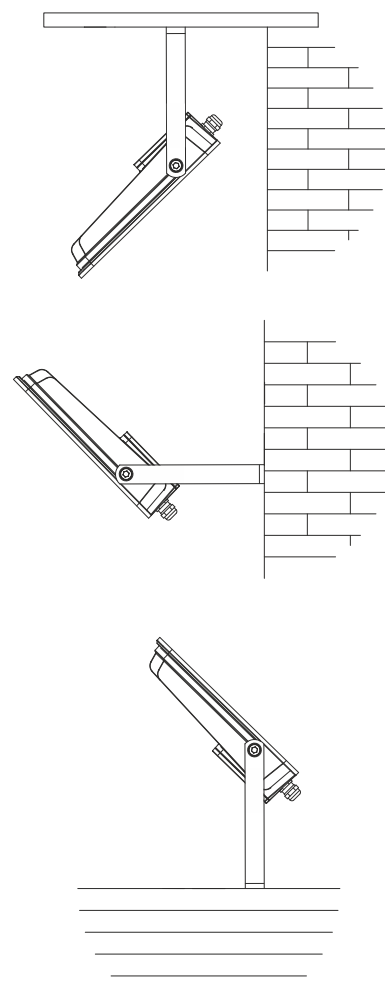


Wire connection guide




Step One

Use screw driver remove the back cover four screws.




Step Two

Take o the back cover.




Step Three

Take o the metal screw and rubber ring.




Step Four

Put the cable into the metal screw, then put the cable into rubber ring. Connect the cable into the inside junction box.



Step Five

Fix the metal screw on cable.



Step Six

Fix the back cover screws.

Dial code:



3000K



4000K



5000K

Note:

The brown wire is connected with the L wire of city electricity
The blue one is connected with the N wire of city electricity.
The green/yellow one is connected with the earth wire.
Power Cord type: HO5RN-F 3 x 1.5mm.

