
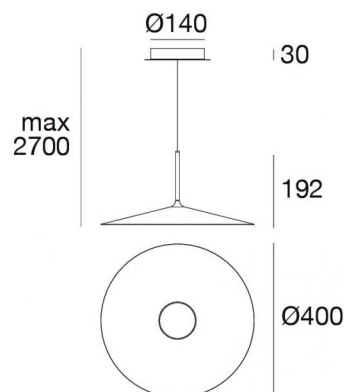


Pendant Luminaires | 220-240 V | 36 topLED 12 W DC - 15 W AC | CRI 90
8360



Technical data	
Construction year	2018
Type	Pendant Luminaires
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	12 W DC
Total Power	15 W
Source lumens	1623 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	No
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.7 m
Resin potting	No
Type of light emission	Single emission
Net weight	1.65 Kg
Electrostatic discharge protection	Yes
Surge protection	Yes

Finishing Finishing casing	
Material	Iron
Colour	Text white RAL9003
Processing	Coating
Finishing Finishing diffuser	
Material	UV resistant polycarbonate
Colour	opaline
Processing	Sandblasting
Finishing Finishing mounting frame	
Material	Iron
Colour	Text white RAL9003
Processing	Coating
Cables Electrification+suspension	
Max cable length	2700 mm

Pendant Luminaires | 220-240 V | 36 topLED 12 W DC - 15 W AC | CRI 90 | Base
8360

Single emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 36 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1623 lm, with a 135.3 lm/W nominal luminous efficacy.

The device body is made of iron and features a text white ral9003 finish, processed by means of coating; the diffuser is made of uv resistant polycarbonate with a sandblasting treatment; the mounting frame is made of iron, with a text white ral9003 finish, processed by means of coating.

The ingress protection degree is IP20; the total weight is of 1.65 kg.

The total absorbed power is 15 W The power supply cable is included and features a 2.7 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains a light source of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	91 %
Source lumens	1623 lm
Delivered lumens	1484 lm
Consumption	15 W
Luminaire efficacy	98 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L70 B10 C0 191000h (at Tj 115 Ta 25)

L80 B10 C0 120000h


L90 B10 C0 58000h

UGR

UGR axial	28.1
UGR transversal	27.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	113°
Light distribution simmetry	Symmetrical

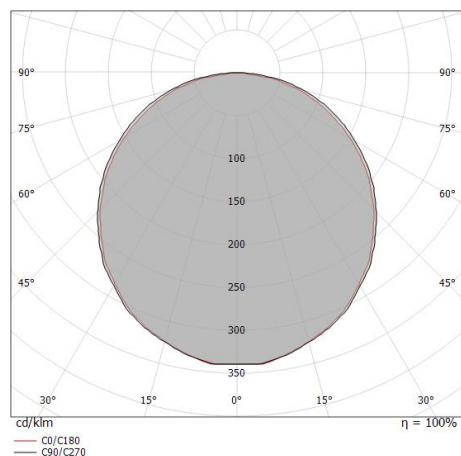

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°) E(C90) E(C0)	2013 153 173
0.5	1.59 1.50		57.8° 56.3°	
1.0	3.18 3.00		57.8° 56.3°	503 38 43
1.5	4.76 4.50		57.8° 56.3°	224 17 19
2.0	6.35 6.00		57.8° 56.3°	126 10 11
2.5	7.94 7.50		57.8° 56.3°	81 6 7
3.0	9.53 9.00		57.8° 56.3°	56 4 5