






Check connections
and polarity


200-250V Driver 12-24V




1. cut-out: Dia85mm.




2. Turn the LED head
counterclockwise out.

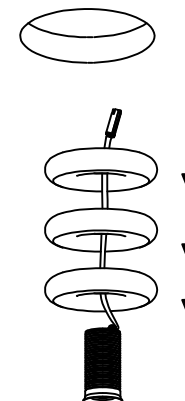


3. Slide the marble discs
onto the LED heads one by one.

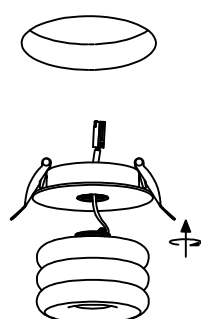


4. Screw the marble disc
with the LED head into
the canopy.

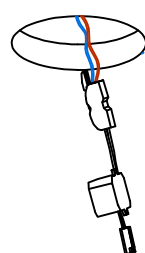


5. Connect the drive cable(L and N)
to the original main cable.

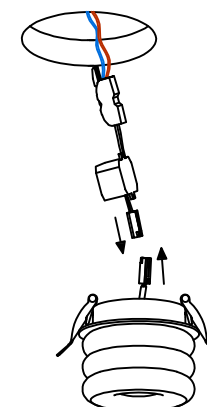

6. Connect the LED cable to
the driver cable .

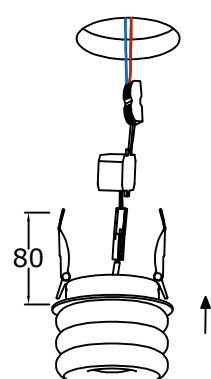

7. Both ends of the product
spring buckle, vertical
put into the ceiling hole.

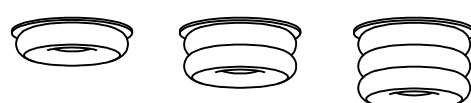

8. Installation complete.