


Pendant Luminaires | 220-240 V | 1xE27
16180



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Bulb included	No
Lamp cap	1 x E27
Light emission direction	downward
Frequency	50-60 Hz
Optics	Diffused
Safety class	2
IP	IP65
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.5 m
Resin potting	No
Net weight	1.410 Kg

Finishing Finishing casing	
Material	Iron
Colour	white RAL 9010
Finishing Finishing diffuser	
Material	PE
Colour	Natural polyethylene
Finishing Finishing mounting frame	
Material	Iron
Colour	white RAL 9010
Cables Electrification+suspension	
Max cable length	2500 mm

Pendant Luminaires | 220-240 V | 1xE27 | Base
16180

Double emission pendant luminaires for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of iron and features a white ral 9010 finish; the diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish.


The ingress protection degree is IP65; the total weight is of 1.410 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	79 %
Delivered lumens	634 lm
Consumption	14 W
Luminaire efficacy	57 lm/W
Junction temperature (lighting fixture)	80
Source lumens	1 x lm
OPTICAL	
C0/C180 optics	180°
Light distribution simmetry	Symmetrical

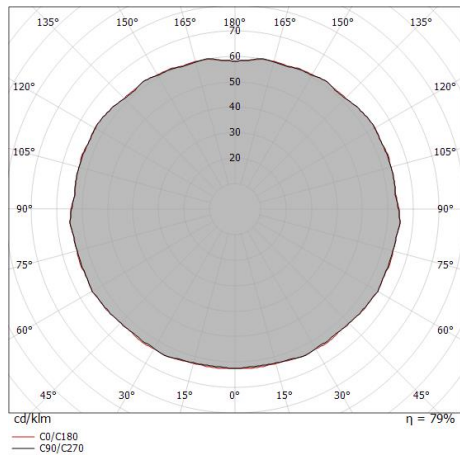

Pendant Luminaires | 220-240 V | 1xE27

16180

Double emission pendant luminaires for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of iron and features a white ral 9010 finish; the diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish.

The ingress protection degree is IP65; the total weight is of 1.410 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.