


Colgantes | 220-240 V | 1xE27

16169



Datos técnicos	
Tipo	Superficie
Posición de instalación	Techo
Ambiente de instalación	Exteriores
Bombilla incluida	No
Casquillo de la bombilla	1 x E27
Light emission direction	downward
Frequency	50-60 Hz
Óptica	Difusa
Clase de aislamiento	2
IP	IP65
IK	IK06
Test del hilo incandescente	650°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Artículo regulable	No
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Largo del cable	2.5 m
Resinado	No
Peso neto	4.400 Kg

Acabado Acabado cuerpo

Material	Hierro
Color	blanco RAL 9010

Acabado Acabado difusor

Material	PE
Color	Natural polyethylene

Acabado Acabado montura

Material	Hierro
Color	Blanco RAL 9010 Mate
Elaboración	Pintura

Cables Electrification+suspension

Longitud máxima de	2500 mm
--------------------	---------

Colgantes | 220-240 V | 1xE27
16169

Single emission pendant luminaires for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of iron and features a white ral 9010 finish; the diffuser is made of pe; the mounting frame is made of iron, with a ral 9010 white matte finish, processed by means of coating.


The ingress protection degree is IP65; the total weight is of 4.400 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Características Luminotécnicas	
Light Output Ratio (LOR)	79 %
Flujo luminoso de luminaria	1506 lm
Consumption	30 W
Rendimiento luminoso de las luminarias	63 lm/W
Temperatura de unión (luminaria)	80
Flujo luminoso (fuente)	1 x lm
OPTICAL	
Óptica C0/C180	180°
Light distribution simmetry	Symmetrical

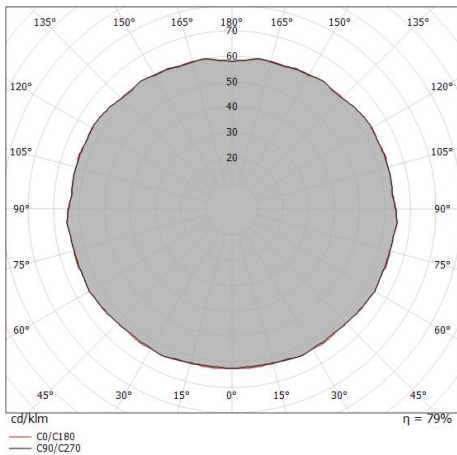

Colgantes | 220-240 V | 1xE27

16169

Single emission pendant luminaires for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

The device body is made of iron and features a white ral 9010 finish; the diffuser is made of pe; the mounting frame is made of iron, with a ral 9010 white matte finish, processed by means of coating.

The ingress protection degree is IP65; the total weight is of 4.400 kg.

The power supply cable is included and features a 2.5 m length.

The device features protection class II and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.