


Luminaria de pie | 220-240 V | 1xE27  
**16160**



Ø 380

| Datos técnicos                                            |                  |
|-----------------------------------------------------------|------------------|
| Tipo                                                      | Luminaria de pie |
| Posición de instalación                                   | Piso             |
| Ambiente de instalación                                   | Exteriores       |
| Bombilla incluida                                         | No               |
| Casquillo de la bombilla                                  | 1 x E27          |
| Light emission direction                                  | upward           |
| Frequency                                                 | 50-60 Hz         |
| Óptica                                                    | Difusa           |
| Clase de aislamiento                                      | 2                |
| IP                                                        | IP65             |
| IK                                                        | IK10             |
| Test del hilo incandescente                               | 650°             |
| Montaje directo sobre superficies normalmente inflamables | Sí               |
| CE                                                        | Sí               |
| Artículo regulable                                        | No               |
| Orientabilidad                                            | No               |
| Basculación                                               | No               |
| Practicabilidad                                           | No               |
| Transitabilidad                                           | No               |
| Cable incluido.                                           | Sí               |
| Enchufe eléctrico                                         | Type F           |
| Largo del cable                                           | 5 m              |
| Resinado                                                  | No               |
| Peso neto                                                 | 2.000 Kg         |

| Acabado Acabado difusor |                      |
|-------------------------|----------------------|
| Material                | PE                   |
| Color                   | Natural polyethylene |

| Acabado Acabado montura |        |
|-------------------------|--------|
| Material                | PC     |
| Color                   | blanco |

Luminaria de pie | 220-240 V | 1xE27  
**16160**

Single emission floor lamp for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.


The ingress protection degree is IP65; the total weight is of 2.000 kg.

The power supply cable is included and features a 5 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

| Características Luminotécnicas         |             |
|----------------------------------------|-------------|
| Light Output Ratio (LOR)               | 79 %        |
| Flujo luminoso de luminaria            | 975 lm      |
| Consumption                            | 20 W        |
| Rendimiento luminoso de las luminarias | 61 lm/W     |
| Temperatura de unión (luminaria)       | 80          |
| Flujo luminoso (fuente)                | 1 x lm      |
| OPTICAL                                |             |
| Óptica C0/C180                         | 180°        |
| Light distribution simmetry            | Symmetrical |

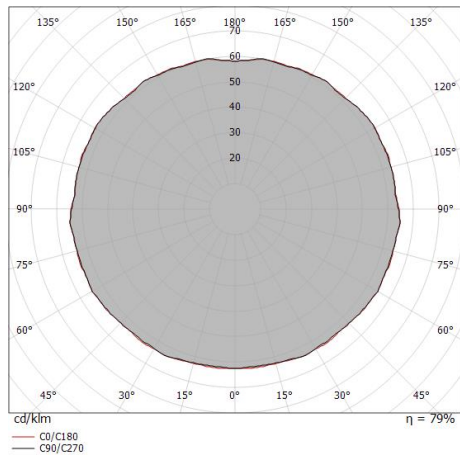

Luminaria de pie | 220-240 V | 1xE27

**16160**

Single emission floor lamp for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.


The ingress protection degree is IP65; the total weight is of 2.000 kg.

The power supply cable is included and features a 5 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Oh!\_FL65 E27 | Floor Lamp | Accessories  
**16160**




Piquete

posición de instalación: terreno, Material de revestimiento: policarbonato resistente a los rayos uv

**Code**


14931



Caja de empotrar - caja de empotrar para instalación en el suelo o en el cemento

**Code**

14930



antirrobo - estribo de fijación en el suelo con función antirrobo

**Code**


14080



Conector

**Code**

14992



Fijación de tirantes - Tirantes de fijación de acero

Material: Acero inoxidable --, color: acero.

**Code**

53890