


Luminaria de pie | 220-240 V | 1xE27
16218

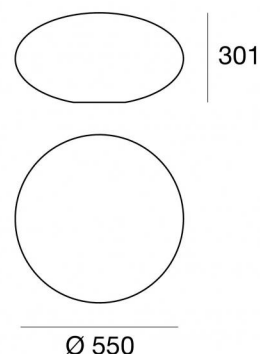

Datos técnicos	
Tipo	Luminaria de pie
Posición de instalación	Piso
Ambiente de instalación	Exteriores
Bombilla incluida	No
Casquillo de la bombilla	1 x E27
Light emission direction	upward
Frequency	50-60 Hz
Óptica	Difusa
Clase de aislamiento	2
IP	IP65
IK	IK10
Test del hilo incandescente	650°
Montaje directo sobre superficies normalmente inflamables	Sí
CE	Sí
Artículo regulable	No
Orientabilidad	No
Basculación	No
Practicabilidad	No
Transitabilidad	No
Cable incluido.	Sí
Enchufe eléctrico	Type F
Largo del cable	5 m
Resinado	No
Peso neto	3.190 Kg

Acabado Acabado difusor	
Material	PE
Color	translúcido

Acabado Acabado montura	
Material	PC
Color	blanco

Luminaria de pie | 220-240 V | 1xE27
16218

Single emission floor lamp for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.


The ingress protection degree is IP65; the total weight is of 3.190 kg.

The power supply cable is included and features a 5 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Características Luminotécnicas	
Light Output Ratio (LOR)	88 %
Flujo luminoso de luminaria	622 lm
Consumption	46 W
Rendimiento luminoso de las luminarias	15 lm/W
Temperatura de unión (luminaria)	80
Flujo luminoso (fuente)	1 x lm
UGR	
UGR axial	10.6
UGR transversal	10.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
OPTICAL	
Óptica C0/C180	176°
Light distribution simmetry	Symmetrical

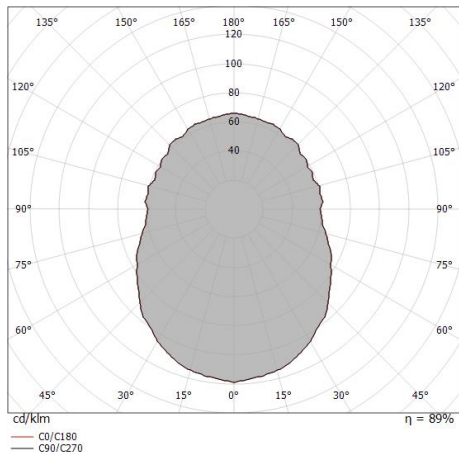

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	28.64	E(0°) E(C0) 88.0° 333 0
1.0	57.27	E(0°) E(C0) 88.0° 83 0
1.5	85.91	E(0°) E(C0) 88.0° 37 0
2.0	114.55	E(0°) E(C0) 88.0° 21 0
2.5	143.18	E(0°) E(C0) 88.0° 13 0
3.0	171.82	E(0°) E(C0) 88.0° 9 0

Distance [m] Cone diameter [m] Illuminance [lx]
— C0/C180 (Half-peak divergence: 176.0°)

Luminaria de pie | 220-240 V | 1xE27

16218

Single emission floor lamp for outdoor application. Compatibility: LED lamp; lamp cap 1xE27.

Product suitable for installations in coastal areas with high salinity and strong exposure to atmospheric agents.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish.


The ingress protection degree is IP65; the total weight is of 3.190 kg.

The power supply cable is included and features a 5 m length.

The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Oh! Smash_FL65 | Floor Lamp | Accessories
16218




Piquete

posición de instalación: terreno, Material de revestimiento: policarbonato resistente a los rayos uv

Code

14931



Caja de empotrar - caja de empotrar para instalación en el suelo o en el cemento

Code

14930