

FIL WALL

Wall-mounted luminaire that blends the elegance of glass with the strength of aluminum, featuring a COB LED strip that delivers a continuous, soft, and enveloping glow. Its refined vertical design creates a striking interplay of light and shadow, adding character and distinction to any architectural or decorative space.

Qualities

LED | 24V | IP20 | 55.000h | McAdam C3

Led Colour

2.7K | 3K | 4K

Regulation

NO DIM | DALI

Beam Angle


90°

Finish

Diffuser

Installation

TEC. DRAWINGS

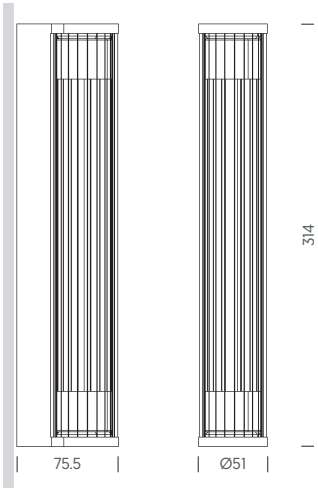

	W	V	TEMP	LUM	CRI
FIL WALL	6W	24V	2.700K	252	>90
			3.000K	268	
			4.000K	302	

REF. CODE

CODE BASE	Technology	Power	LED Control	LED Colour	Beam angle	Instalation	Finishes
FILW	A Led	05 06W	N NoDim	2 2700K	9 90°	S Surface	BS Black
			D Dali	3 3000K			BR Bronze
			K Casambi	4 4000K			CO Cooper
							GD Gold
							PL Silver

Polígono industrial B, Parcela 3
46800 Xàtiva, Valencia (España)
T. +34 962 259 020
onok@onok.es www.onoklighting.com

3 Year Guarantee* UPGRADEABLE TO 5 UNDER SPECIAL GUARANTEE CONDITIONS