




SERIE: MIJAS

REF. M-123526+B

### Descripción

Collection of LED outdoor wall lights, equipped with high performance light emitting diode. Body made of aluminum injection, diffuser in PC Clear. Protection against the penetration of solid and liquid particles. Allows its installation outdoors. Pre-wired luminaire

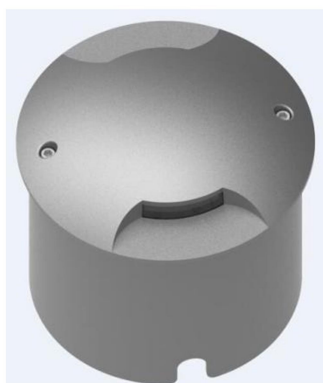


#### FINISHES AVAILABLE

DARK GREY

MATT BLACK

#### ENERGY EFFICIENCY


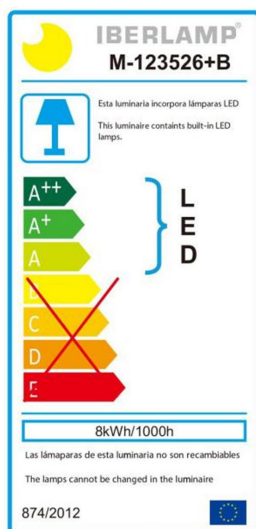





Application	SURFACE
IP Rating	IP67
Light source	LED 5050
Wattage	8 W
Chip Brand	CREE
CCT Kelvin	3000 / 4000 / 5000K
Lumen	50
IF—VF	200 mA—27-40V
C.R.I	≥ 80
SDCM	≤ 5
IK	10
Beam Angle	2-(73 °, 186 °)
Input Voltage—Frequency	100-240V~ 50/60Hz
Electrical Classification	I
Lifespan	25000h. L70B50
Driver	Inside—Included
Power Factor:	0.9
Power Efficiency	84%
Measure mm	Φ 150 x 135 mm.
Working humidity	10%~90%RH
Weight Kg.	1.2
Working humidity	-30°~+45°
Lighting distance	3 m
Certificates - Standard	CE - IEC 60598-1/IEC 62031
Warranty years	3
<b>MATERIALES / ACABADOS</b>	
Structure material	High quality aluminum
Diffuser Material	PC
Structure finishing	Anti - UV powder coating finish
Diffuser finishing	Clear

IBERLAMP reserves the right to carry out the appropriate technical modifications in order to improve the performance of the product.  
We recommend consulting with the sales team to clarify any doubts.


# Photometric Results

CIE Class:	Direct
Total Rated Lamp Lumens:	50 lm.
Measurement Flux:	50 lm.
Efficiency:	2.2 %
Downward Ratio:	1.1%
Upward Ratio:	1.1%
Luminaire Efficiency Rating (LER):	10
Central Intensity:	112.2 cd.
Max. Intensity:	112.2 cd.
Pos. Of Max Intensity:	H5.0 V-175.0
IES File Name	M-123526+B

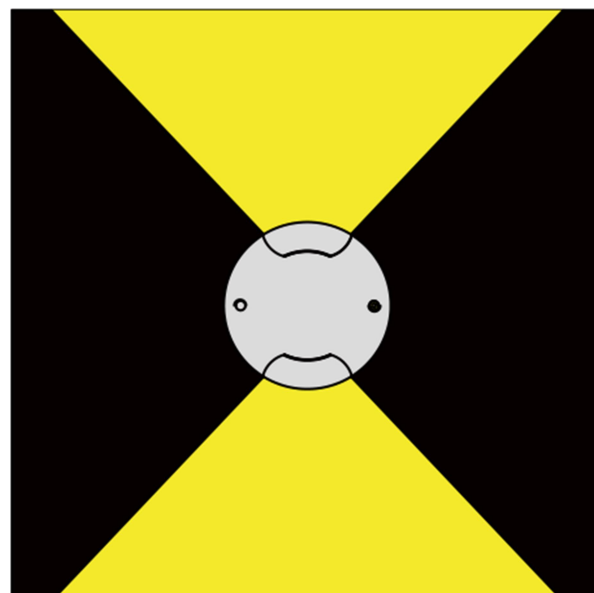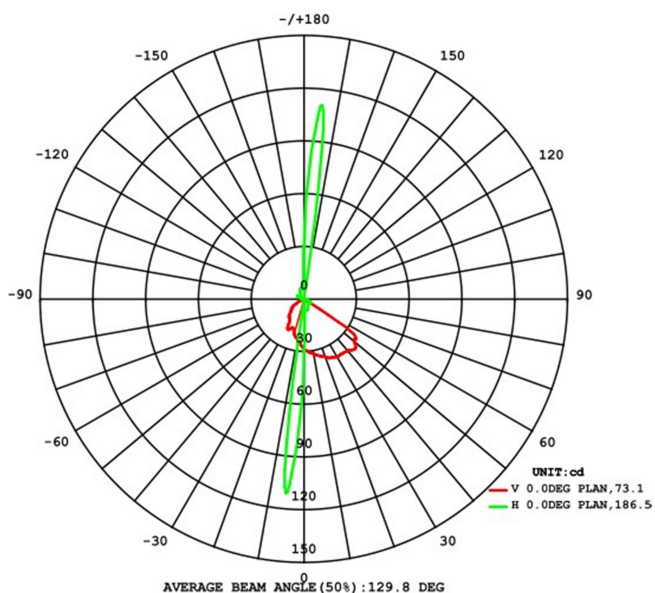

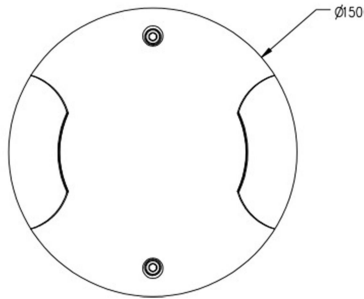

**IBERLAMP**

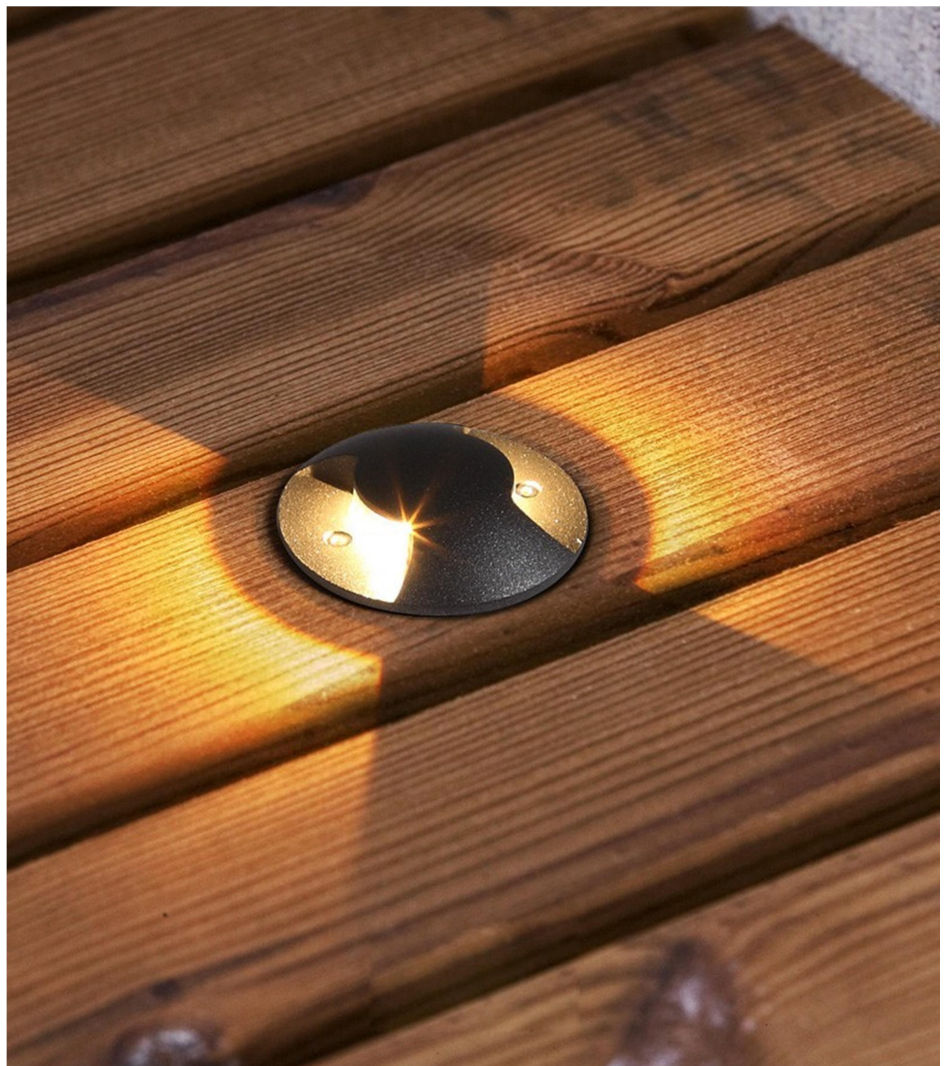

IBERLAMP reserves the right to make the necessary technical modifications in order to improve the performance of the product.

We recommend consulting with the commercial team to answer any questions.